



**Choose the  
Roto and Heavy Lift  
Telehandler hire  
specialists**

**Roto and Heavy Lift Telehandler Guide**



## UK Forks are the only choice for Roto and Heavy Lift Telehandler hire. Here are a few reasons why:

### Great availability

We have a large and diverse fleet of Roto and Heavy Lift Telehandlers that are the solution for any material handling project.

### Quality machines

Our customers demand the best, so we supply it. Our fleet only boasts machines from JCB, Merlo, Manitou and Magni.

### We've got your spec

Green beacons, cameras, whatever spec you need, you can be confident that our machines, and you, are compliant.

### We've got your back

Our service engineers are deployed nationwide to get to our machines fast, should you need, and keep your sites working.



### We're green through and through

Being green is more than our brand colour, it's who we are. As part of Vp Group plc, we aim to be net zero by 2050 at the latest.

### Did we mention we're the specialists?

From site surveys to assistance with lift plans, you're always connected to the people you need to get the job done: Us.

### We can help if you need an operator

We have partnered with the leading supplier of roto operators so you can access qualified and skilled operators should you need.

### We invest in our fleet

We ensure the latest innovations are available to our customers such as the JCB 555-210R and JCB 555-260R machines.

## Service that delivers on the metrics you care about

We're the material handling specialists for a reason. Our exclusive focus on material lifting machines makes us the premier provider of Roto and Heavy Lift Telehandler hire in the UK.

But it's not just this focus, or the quality and reliability of our machines that set us apart; it's our people.

When you hire a machine from UK Forks, you also get the full support of our knowledgeable, passionate and highly-trained team of engineers, support and service desk colleagues who are here to help you deliver on all your build and business objectives and ensure our machines continually provide safe, reliable, productive and efficient operation.

**>> We focus on minimising machine downtime**

**>> All machines go through a rigorous and extensive pre-hire process and thorough Pre-Delivery Inspection (PDI)**

**>> All our field service engineers are manufacturer-trained and complete regular training sessions at our new Milton Keynes training facility**

**>> Our vans are profiled for telehandlers only which means we can fix most things on site**

**>> Choose the material handling specialists**

0800 123 101 | [tele.handlers@vpplc.com](mailto:tele.handlers@vpplc.com) | [www.ukforks.com](http://www.ukforks.com)



# JCB 555-210R/555-260R Roto Telehandler



## Specification Snapshot

		555-210R	555-260R
Overall height	m	3.08	3.08
Overall length (to fork face)	m	6.92	8.09
Overall width	m	2.45	2.45
Ground clearance	m	0.35	0.35
Turning radius over tyres	m	4.29	4.29
Load capacity at max height *	kg	2,500	2,000
Load capacity at max forward reach*	kg	850	300
Overall weight	kg	17,960	19,400

\* With outriggers deployed



Maximum  
forward reach

555-210R	555-260R
17.8m	21.4m



Maximum  
lift height

555-210R	555-260R
20.5m	25.5m



Maximum  
load capacity

555-210R	555-260R
5,500kg	5,500kg



# Manitou MRT 2150/MRT 2550 Roto Telehandler



Specification Snapshot		MRT 2150	MRT 2550
Overall height	m	3.05	3.05
Overall length (to fork face)	m	6.87	7.83
Overall width	m	2.49	2.49
Ground clearance	m	0.35	0.35
Turning radius over tyres	m	5.23	4.88
Load capacity at max height *	kg	2,000	2,500
Load capacity at max forward reach*	kg	800	400
Overall weight	kg	17,930	18,900

\* With outriggers deployed



Maximum  
forward reach

MRT 2150	MRT 2550
17.9m	21.4m



Maximum  
lift height

MRT 2150	MRT 2550
20.9m	24.7m



Maximum  
load capacity

MRT 2150	MRT 2550
4,999kg	4,999kg



# Manitou MRT 2470 Roto Telehandler



## Specification Snapshot

Overall height	m	3.05
Overall length (to fork face)	m	7.55
Overall width	m	2.49
Ground clearance	m	0.35
Turning radius over tyres	m	6.50
Load capacity at max height *	kg	2,500
Load capacity at max forward reach*	kg	850
Overall weight	kg	21,760

\* With outriggers deployed



Maximum  
forward reach  
**20.5m**



Maximum  
lift height  
**23.7m**



Maximum  
load capacity  
**7,000kg**



# Merlo 60.24 MCSS Roto Telehandler



## Specification Snapshot

Overall height	m	3.10
Overall length (to fork face)	m	7.43
Overall width	m	2.49
Ground clearance	m	0.38
Turning radius over tyres	m	4.45
Load capacity at max height *	kg	3,000
Load capacity at max forward reach*	kg	850
Overall weight	kg	18,750

\* With outriggers deployed



Maximum  
forward reach

**20.8m**



Maximum  
lift height

**23.9m**



Maximum  
load capacity

**6,000kg**



# Merlo 40.26 MCSS Roto Telehandler



Maximum  
forward reach

**22.9m**



Maximum  
lift height

**26.0m**



Maximum  
load capacity

**4,000kg**

## Specification Snapshot

Overall height	m	2.95
Overall length (to fork face)	m	6.98
Overall width	m	2.40
Ground clearance	m	0.33
Turning radius over tyres	m	4.05
Load capacity at max height *	kg	1,500
Load capacity at max forward reach*	kg	150
Overall weight	kg	16,050

\* With outriggers deployed



# Merlo 50.30 S Plus/40.30 MCSS Roto Telehandler



## Specification Snapshot

		50.30 S Plus	40.60 MCSS
Overall height	m	3.14	3.10
Overall length (to fork face)	m	7.56	7.56
Overall width	m	2.49	2.49
Ground clearance	m	0.38	0.35
Turning radius over tyres	m	4.50	4.45
Load capacity at max height *	kg	2,000	2,000
Load capacity at max forward reach*	kg	400	400
Overall weight	kg	20,200	19,200

\* With outriggers deployed



Maximum  
forward reach

50.30 S Plus	40.30 MCSS
<b>25.5m</b>	<b>25.5m</b>



Maximum  
lift height

50.30 S Plus	40.30 MCSS
<b>29.3m</b>	<b>29.5m</b>



Maximum  
load capacity

50.30 S Plus	40.30 MCSS
<b>4,950kg</b>	<b>4,000kg</b>



# Manitou MRT 3050 Roto Telehandler



## Specification Snapshot

Overall height	m	3.05
Overall length (to fork face)	m	7.94
Overall width	m	2.49
Ground clearance	m	0.35
Turning radius over tyres	m	6.50
Load capacity at max height *	kg	2,000
Load capacity at max forward reach*	kg	350
Overall weight	kg	21,850

\* With outriggers deployed



Maximum  
forward reach  
**25.8m**



Maximum  
lift height  
**29.7m**



Maximum  
load capacity  
**4,999kg**



# Merlo 50.35 S Plus Roto Telehandler



## Specification Snapshot

Overall height	m	3.33
Overall length (to fork face)	m	8.59
Overall width	m	2.49
Ground clearance	m	0.31
Turning radius over tyres	m	4.84
Load capacity at max height *	kg	2,000
Load capacity at max forward reach*	kg	500
Overall weight	kg	23,350

\* With outriggers deployed



Maximum  
forward reach  
**27.0m**



Maximum  
lift height  
**34.0m**



Maximum  
load capacity  
**4,950kg**



# Magni RTH 6.35SH Roto Telehandler



## Specification Snapshot

Overall height	m	3.05
Overall length (to fork face)	m	8.00
Overall width	m	2.50
Ground clearance	m	0.34
Turning radius over tyres	m	6.83
Load capacity at max height *	kg	2,500
Load capacity at max forward reach*	kg	400
Overall weight	kg	23,870

\* With outriggers deployed



Maximum  
forward reach

**27.0m**



Maximum  
lift height

**34.9m**



Maximum  
load capacity

**6,000kg**



# Merlo P 60.10 Heavy Lift Telehandler



## Specification Snapshot

Overall height	m	2.44
Overall length (to fork face)	m	5.34
Overall width	m	2.24
Ground clearance	m	0.48
Transmission type		Hydrostatic
Load capacity at max height	kg	3,000
Load capacity at max forward reach	kg	1,500
Overall weight	kg	9,890



Maximum  
forward reach

**5.50m**



Maximum  
lift height

**9.55m**



Maximum  
load capacity

**6,000kg**



# Merlo P 72.10 Heavy Lift Telehandler



## Specification Snapshot

Overall height	m	2.44
Overall length (to fork face)	m	5.34
Overall width	m	2.24
Ground clearance	m	0.48
Transmission type		Hydrostatic
Load capacity at max height	kg	4,000
Load capacity at max forward reach	kg	2,000
Overall weight	kg	10,500



Maximum  
forward reach

**5.50m**



Maximum  
lift height

**9.55m**



Maximum  
load capacity

**7,200kg**



# Merlo P 120.10 Heavy Lift Telehandler



## Specification Snapshot

Overall height	m	2.85
Overall length (to fork face)	m	5.74
Overall width	m	2.40
Ground clearance	m	0.45
Transmission type		Hydrostatic
Load capacity at max height	kg	5,000
Load capacity at max forward reach	kg	2,750
Overall weight	kg	15,650



Maximum  
forward reach

**5.70m**



Maximum  
lift height

**9.80m**



Maximum  
load capacity

**12,000kg**



# Attachments



Man Platform



P6000 Jib Extension



Fly Jib with Winch



Outrigger Pads



Fork Extensions



Carriage Hook



Reduced Height Hook



Remote Control



Carriage Hook



Box Winch



## Attachments that get the job done

Our Roto and Heavy Lift Telehandlers are versatile machines designed to tackle the most demanding of jobs and our range of accompanying attachments are equally as robust and adaptable.

From Man Platforms to Fork Extensions, we supply the full and comprehensive range of attachments to enable you to get the job done no matter the utility you demand from one of our hard working machines. You can also be confident in the highest levels of safety as all our attachments are manufacturer-supported and approved.

## Don't Forget...

Alongside our Roto and Heavy Lift Telehandlers, our telehandler fleet is one of the largest, and most diverse, that is available in the UK today.

We have the full complement of machines that range from the compact 4m JCB 520-40 to the versatile 20m JCB 540-200 and with a substantial stock of the popular 14m JCB 540-140 Telehandlers ready to hire.

We also have a fleet of electric machines which include the JCB 525-60E Electric Telehandler which offer near silent operation on site and with zero emissions, which makes them perfect for a range of indoor and nighttime projects.

With the full range of attachments available and a service that can spec a machine to your site's needs, make sure you choose UK Forks, the material handling specialists.



## National Coverage



**When we say there is a UK Forks machine hard at work in every corner of the UK, we mean it.**

In the fast-paced world of construction, availability and speed of delivery are a key consideration, which is why our national network of depots means we can get a Roto or Heavy Lift Telehandler to you, no matter where your site is located in the UK.

**1**

### **Head Office**

UK Forks  
Central House  
Beckwith Knowle  
Otley Road  
Harrogate  
HG3 1UD

**2**

### **Glasgow Depot**

**5**

### **Milton Keynes Depot**

**3**

### **Leeds Depot**

**6**


### **Aylesford Depot**

**4**

### **West Bromwich Depot**

**7**

### **Exeter Depot**

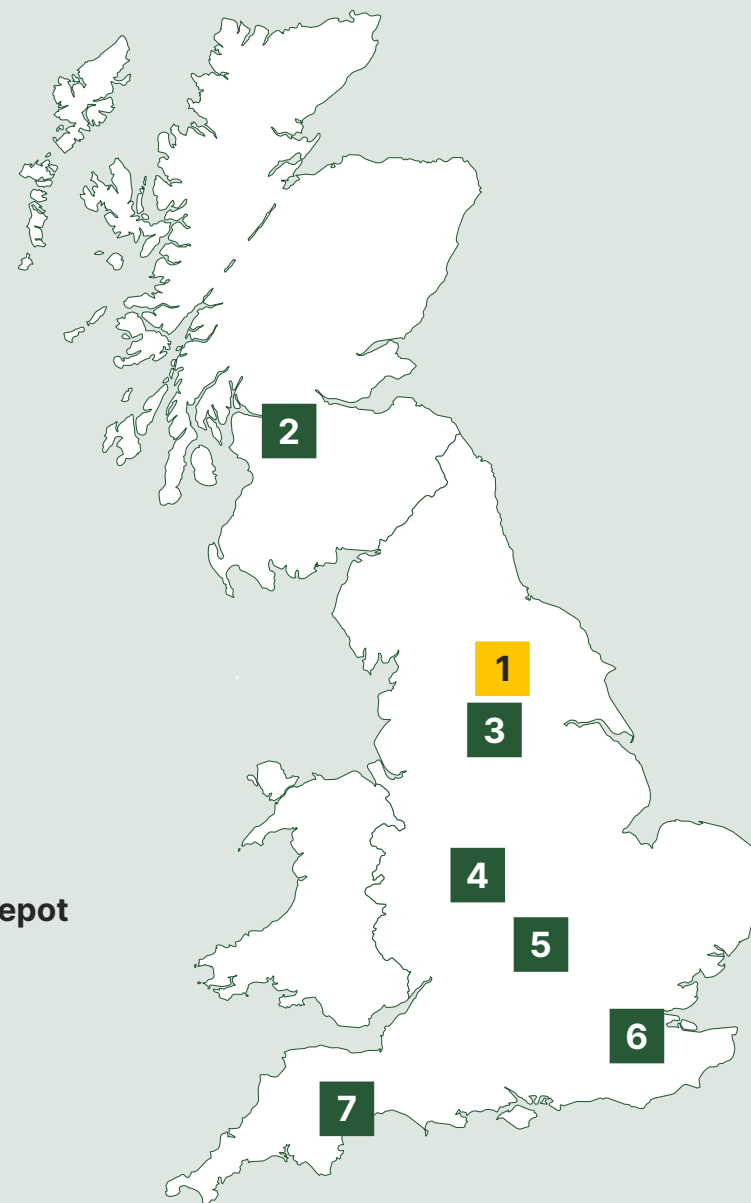

# The **only** choice for the hire of Roto and Heavy Lift Telehandlers

---

0800 123 101

[tele.handlers@vpplc.com](mailto:tele.handlers@vpplc.com)

[www.ukforks.com](http://www.ukforks.com)



**UK Forks**  
Materials Handling Specialists